

# EN

## 特点 Features

- 85°C 20000H. 85°C 20000 hours.
- 电压范围：350V~450V。Voltage range：350V~450V.
- 耐高纹波，超长寿命。High ripple current, Ultra long life.
- 满足RoHS要求。RoHS compliant.



## 主要技术性能 Specifications


项目 Items	特性 Performance Characteristics					
类别温度范围 Category Temperature Range	-25~+85°C					
额定电压范围 Rated Voltage(U <sub>R</sub> )	350~450V					
标称电容容量范围 Nominal Capacitance Range(C <sub>R</sub> )	1000~12000µF	120Hz, +20°C				
标称电容容量允许偏差 Allowed Capacitance Tolerance(C <sub>T</sub> )	±20%(M)	120Hz, +20°C				
漏电流 Leakage Current(I <sub>L</sub> )	I <sub>L</sub> ≤ 0.01 C <sub>R</sub> U <sub>R</sub> (µA)或5(mA),取较小值 ( Whichever is smaller )					
损耗角正切值 Tangent of loss angle(Tanδ)	≤0.15	Max. 120Hz, +20°C				
低温特性 Characteristics at low Temperature	<table border="1"> <tr> <td>U<sub>R</sub>(V)</td> <td>350~450</td> </tr> <tr> <td>Z<sub>-25°C</sub> / Z<sub>+20°C</sub></td> <td>8</td> </tr> </table>	U <sub>R</sub> (V)	350~450	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	8	Max. 120Hz
U <sub>R</sub> (V)	350~450					
Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	8					
高温贮存 Shelf Life	+85°C, 1000小时贮存后, 加额定工作电压处理30分钟, 恢复16小时后: After storage for 1000 hours at +85°C, U <sub>R</sub> to be applied for 30 minutes and then resumed for 16 hours: 电容量变化率 Capacitance change : ±20%初始测量值以内 ±20% of the initial measured value 漏电流 Leakage current : ≤初始规定值 ≤Initial specified value 损耗角正切值 Dissipation factor : ≤2倍初始规定值 ≤2 times of the initial specified value					

	使用寿命(Useful Life)		负载寿命(Load Life)	耐久性测试(Endurance Test)
寿命时间(Lifetime)	25000h	> 250000h	20000h	20000h
漏电流(Leakage Current)	≤初始规定值 Not more than specified value		≤初始规定值 Not more than specified value	≤初始规定值 Not more than specified value
电容量变化率(Capacitance Change)	±30%初始测量值内 Within ±30% initial value		±25%初始测量值内 Within ±25% initial value	±10%初始测量值内 Within ±10% initial value
损耗角正切值(Dissipation Factor)	≤3倍初始规定值 Not more than 300% of specified value		≤2.5倍初始规定值 Not more than 250% of specified value	≤1.3倍初始规定值 Not more than 130% of specified value
应用条件(Condition)	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub>	U <sub>R</sub>
应用电压(Applied Voltage)	I <sub>R</sub>	1.2×I <sub>R</sub>	I <sub>R</sub>	I <sub>R</sub> =0
应用电流(Applied Current)	85°C	40°C	85°C	85°C
应用温度(Applied Temperature)	≤1%	≤1%	0%	0%
失效率(Outlier Percentage)				

## 频率系数 Frequency Coefficient

Frequency (Hz)	50	100/120	300	1k	≥10K
U <sub>R</sub> (V)					
350~450	0.70	1.00	1.10	1.30	1.40

## 寿命时间图 Life Time Graph

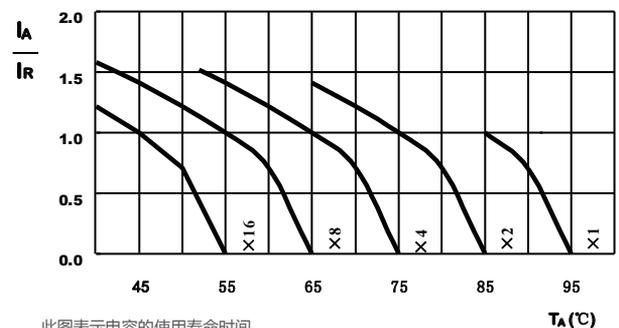

此图表示电容的使用寿命时间  
The graphs shows a typical trend of the standard capacitor useful life.

规格特性表  
Table of specifications and characteristics

$U_r(V)$	$C_r(\mu F)$	$DF_{max}$ 120Hz 20°C -	$ESR_{max}$ 120Hz 25°C mΩ	$ESR_{typ}$ 120Hz 25°C mΩ	$I_{AC,max}$ 120Hz 85°C A	$\Phi D \times L$ mm×mm
350	1000	0.15	199	106	4.0	51×75
	1200	0.15	166	88	4.3	51×75
	1500	0.15	133	71	5.3	51×95
	1800	0.15	111	59	5.8	51×95
	2200	0.15	90	48	7.2	51×130
	2700	0.15	74	39	7.8	63.5×95
	3300	0.15	60	32	9.2	63.5×115
	3900	0.15	51	27	10.5	63.5×130
	4700	0.15	42	23	11.7	76×115
	5600	0.15	36	19	13.3	76×130
	6800	0.15	29	16	15.6	76×155
	8200	0.15	24	13	18.2	89×155
	10000	0.15	20	11	20.1	89×155
	12000	0.15	17	9	23.9	89×195
400	1000	0.15	199	106	4.1	51×75
	1200	0.15	166	88	4.8	51×95
	1500	0.15	133	71	5.7	51×115
	1800	0.15	111	59	6.5	51×130
	2200	0.15	90	48	7.1	63.5×95
	2700	0.15	74	39	8.3	63.5×115
	3300	0.15	60	32	9.6	63.5×130
	3900	0.15	51	27	11.2	76×115
	4700	0.15	42	23	12.2	76×130
	5600	0.15	36	19	14.2	76×155
	6800	0.15	29	16	16.6	89×155
	8200	0.15	24	13	18.3	89×155
	10000	0.15	20	11	21.9	89×195
	450	1000	0.15	199	113	4.3
1200		0.15	166	94	5.1	51×115
1500		0.15	133	75	6.1	51×130
1800		0.15	111	63	6.5	63.5×95
2200		0.15	90	51	7.5	63.5×115
2700		0.15	74	42	8.8	63.5×130
3300		0.15	60	34	10.3	76×130
3900		0.15	51	29	12.4	76×150
4700		0.15	42	24	13.1	76×155
5600		0.15	36	20	15.1	89×155
6800		0.15	29	17	18.2	89×195
8200		0.15	24	14	20.1	89×195

ALUMINIUM ELECTROLYTIC CAPACITORS

SMD

MINIATURE

BI-POLAR

STANDARD

LOW-ESR

HIGH RELIABILITY

SNAP-IN

SCREW